

JON M. HUNTSMAN, JR.

Governor

GARY R. HERBERT Lieutenant Governor

Department of Administrative Services KIMBERLY HOOD Executive Director

Division of Facilities Construction and Management DAVID G. BUXTON Director

ADDENDUM #3

Date: 07 September 2007

To: Architects/Engineers

From: Matthias Mueller, Program Director, DFCM

Reference: Redwood Road ABC Remodel and Expansion - 06233030

Subject: Addendum No. 3

Pages Total pages 2

Note: This Addendum shall be included as part of the Agreement. Short listed firms shall acknowledge receipt of this Addendum by letter submitted at the time of their interview

SCHEDULE HAS NOT BEEN CHANGED


3.1 Correct drawing A601 has been added




FINISH SCHEDULE										
ROOM	FLOOR	WALL	BASE	CEILING	HEIGHT	REMARKS				
ENTRY VESTIBULES	THICKSET TILE/ENTRY MAT	PNTD GYP BD	CERAMIC TILE	PNTD GYP BD	14'-0"					
SALES AREA	THICKSET TILE	PNTD GYP BD	CERAMIC TILE	2 X 4 ACOUSTICAL	10'-4"					
STOREROOM	SEALED CONCRETE	PNTD GYP BD	VINYL	2 X 4 ACOUSTICAL	10'-4"					
OFFICE	VCT	PNTD GYP BD	VINYL	2 X 4 ACOUSTICAL	11'-6"	RAISED PLATFORM				
STORAGE	SEALED CONCRETE	PNTD GYP BD	VINYL	2 X 4 ACOUSTICAL	11'-6"					
JANITOR'S ROOM	SEALED CONCRETE	PNTD GYP BD	VINYL	2 X 4 ACOUSTICAL	11'-6"	TILE TWO WALLS AT FLOOR SINK, SEE ELEV.				
WOMEN'S TOILET	THICKSET TILE	TILE	TILE	PNTD GYP BD	8'-0"	WALL TILE FLOOR TO CEILING				
MEN'S TOILET	THICKSET TILE	TILE	TILE	PNTD GYP BD	8'-0"	WALL TILE FLOOR TO CEILING				
LUNCH COUNTER	SEALED CONCRETE	PNTD GYP BD	VINYL	2X4 ACOUSTICAL	10'-4"	SEE INTERIOR ELEVATIONS FOR CABINETRY				
ENCLOSED DOCK	SEALED CONCRETE	PNTD GYP BD	VINYL	EXPOSED STRUCTURE	VARIES					


GLASS TYPES

- 1" THICK "LOW E" INSULATING GLASS: 1/4" TINTED FLOAT GLASS EXTERIOR AND 1/4" CLEAR FLOAT GLASS INTERIOR WITH 1/2" AIR SPACE.
- 1" THICK "LOW E" INSULATING GLASS: 1/4" CLEAR FLOAT TEMPERED GLASS EXTERIOR AND 1/4" CLEAR FLOAT TEMPERED GLASS INTERIOR WITH 1/2" AIR SPACE.
- 1/8" POLYCARBONATE AT IMPACT DOORS AND OVERHEAD DOORS (PROVIDED AND INSTALLED BY DOOR MANUFACTURER).
- SECURITY GLASS "LOW E": 1" THICK INSULATING GLASS: 1/4 TINTED FLOAT GLASS EXTERIOR, AND 5/16" SECURITY-LAMINATED SHEETS OF GLASS WITH INNER LAYER OF .075" VINYL OR POLYCARBONATE @ INTERIOR WITH 7/16" AIRSPACE BETWEEN INTERIOR AND EXTERIOR GLASS.
- SECURITY GLASS "LOW E": 1" THICK INSULATING GLASS: 1/4 TINTED FLOAT TEMPERED GLASS EXTERIOR, AND 5/16" SECURITY-LAMINATED SHEETS OF GLASS WITH INNER LAYER OF .075" VINYL OR POLYCARBONATE @ INTERIOR WITH 7/16" AIRSPACE BETWEEN INTERIOR AND EXTERIOR GLASS.
- SECURITY GLASS "LOW E": 1" THICK INSULATING GLASS: 1/4 CLEAR FLOAT TEMPERED GLASS EXTERIOR, AND 5/16" SECURITY-LAMINATED SHEETS OF GLASS WITH INNER LAYER OF .075" VINYL OR POLYCARBONATE @ INTERIOR WITH 7/16" AIRSPACE BETWEEN INTERIOR AND EXTERIOR GLASS.

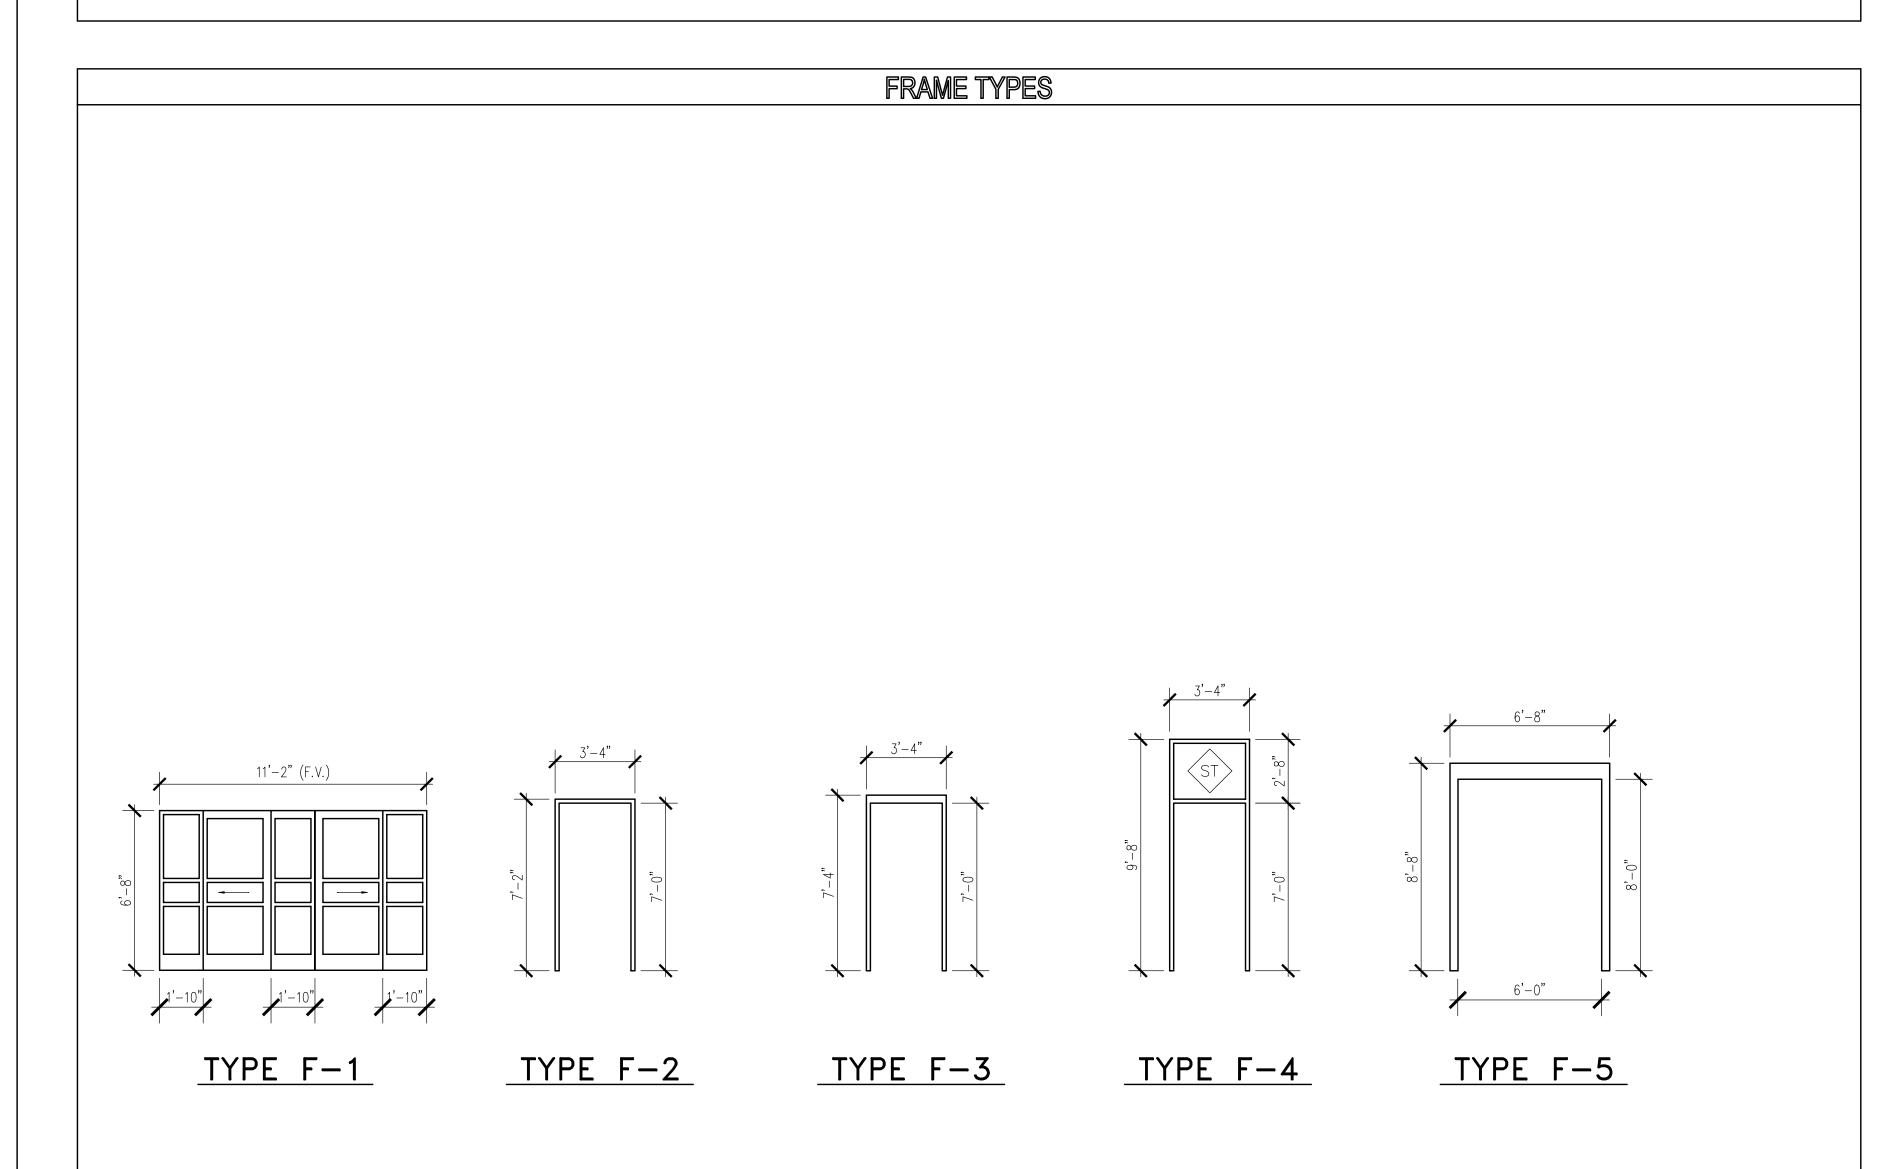

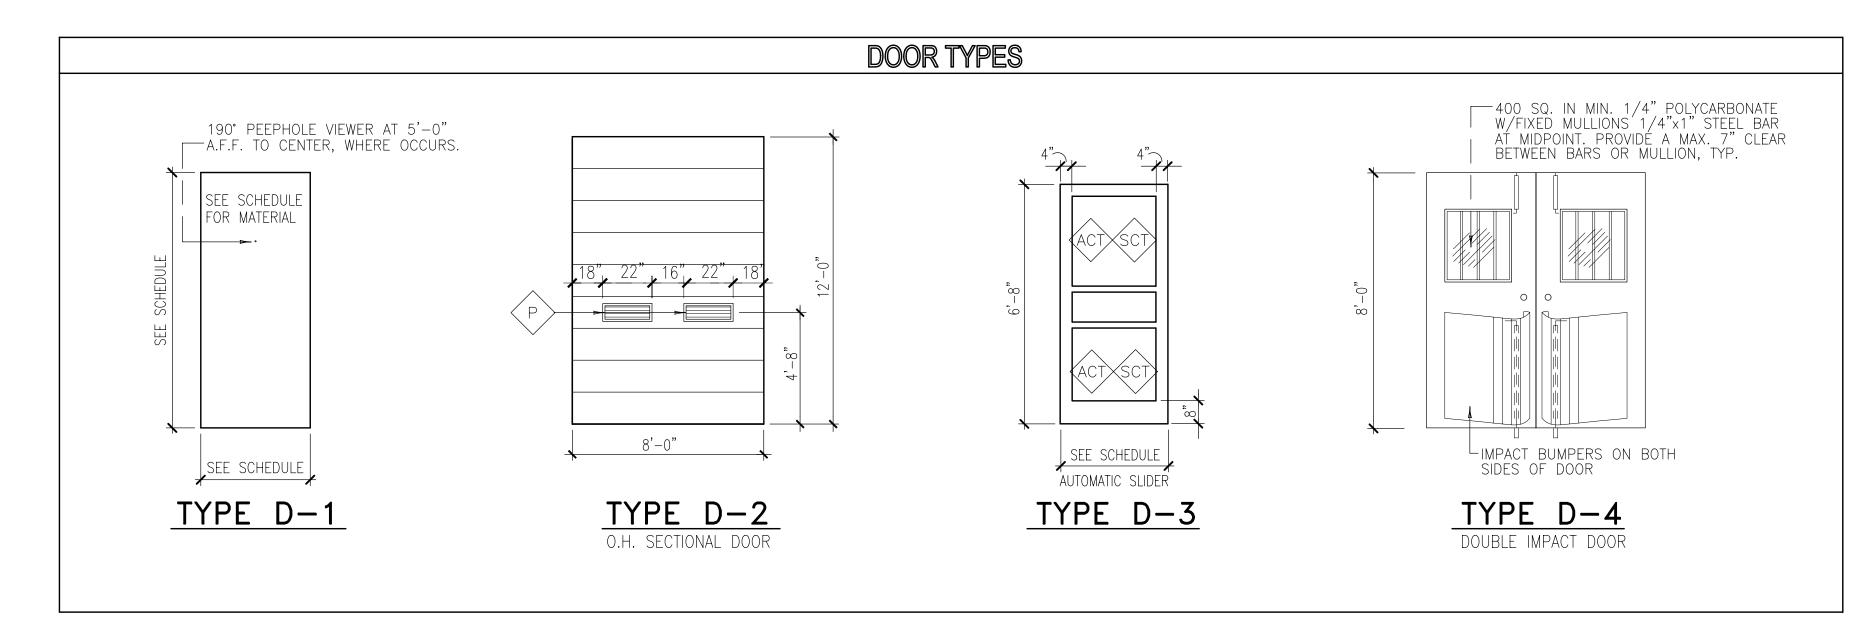

DOOR SCHEDULE														
SIZE		DOOR			FRAME		DETAIL REFERENCE		HDW.	REMARKS				
NO.	WIDTH	HEIGHT	THICK.	TYPE	MATERIAL	FINISH	TYPE	MATERIAL	FINISH	HEAD	JAMB	THRESH.		
1	3'-0"	6'-8"		D - 3	ALUM	FF	F-1	ALUM	FF	24/A501	9/A501	1/A501	1	AUTOMATIC SLIDER W/SENSOR ACTIVATION
2	3'-0"	6'-8"		D - 3	ALUM	FF	F-1	ALUM	FF	24/A501	8/A501	1/A501	2	AUTOMATIC SLIDER W/SENSOR ACTIVATION
3	3'-0"	6'-8"		D - 3	ALUM	FF	F-1	ALUM	FF	24/A501	8/A501	1/A501	1	AUTOMATIC SLIDER W/SENSOR ACTIVATION
4	3'-0"	6'-8"		D - 3	ALUM	FF	F-1	ALUM	FF	24/A501	9/A501	1/A501	2	AUTOMATIC SLIDER W/SENSOR ACTIVATION
5	3'-0"	7'-0"	1 3/4"	D-1	SCW	STAIN	F-2	HM	PAINTED	20/A501	20/A501	5/A501	5	
6	3'-0"	7'-0"	1 3/4"	D-1	SCW	STAIN	F-2	HM	PAINTED	20/A501	20/A501	5/A501	5	
7	3'-0"	7'-0"	1 3/4"	D-1	HOL. MTL.	PAINTED	F-4	HM	PAINTED	20/A501	20/A501	5/A501	4	PROVIDE WITH PEEPHOLE
8	7'-0"	12'-0"		D-2	SEE SPECS	FF		STEEL	PAINTED	19/A501	19/A501	1/A502	8	INSULATED OVERHEAD SECTIONAL DOOR
9	3'-0"	7'-0"	1 3/4"	D-1	НМ	PAINTED	F-3	HM	PAINTED	25/A501	17/A501	4/A501	7	
10	PR 3'-0"	8'-0"		D-4	IMPACT	FF	F-5	HM	PAINTED	18/A501	18/A501(SIM)	——		
11	3'-0"	7'-0"	1 3/4"	D-1	HOL. MTL.	PAINTED	F-4	НМ	PAINTED	20/A501	20/A501	5/A501	4	PROVIDE WITH PEEPHOLE



REVISION # DATE:



